




TECHNICAL DATA CLIP'N LOCK®

Lame de décortiquage (en mm)		Bande EP ou PP*		Entretoise	Dimensions des			
N/mm	PIW	N/mm	PIW		4,5	2,5	4,5	6,5
250/2	253/3		200	Taille unique Entretoise SUPER SCREW®				
315/2	315/3							
400/2	400/3		228					
500/3	500/4							
630/2	630/3	360						

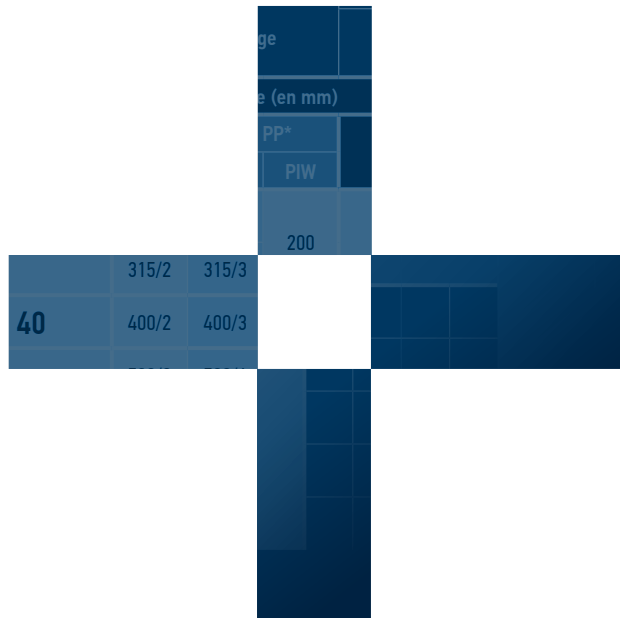

CHOOSE EASILY YOUR CLIP'N LOCK®



	CL25	CL30	CL40	CL50
Lacing pitch, mm	2.54	2.54	3.175	3.67
Belt thickness, mm (Regular point)	1 - 1.5	1.5 - 2	2 - 3	3 - 5
Min. pulley Ø, mm	Ø 20	Ø 30	Ø 40	Ø 60
Failure stress, N/mm	40	68	99	115
Steel quality	316 L Stainless steel	316 L Stainless steel	316 L Stainless steel	316 L Stainless steel
Cable pin	Stainless steel rod [Nylon coated or not] in stainless steel Ø 1 mm	Stainless steel rod or bare [Nylon coated or not] in stainless steel Ø 1.5 - 1.8 mm	Stainless steel rod or bare [Nylon coated or not] in stainless steel Ø 1.8 - 2.1 mm	Stainless steel rod or bare [Nylon coated or not] in stainless steel Ø 2.1 - 2.6 mm
Available combs, mm	350 (14") - 600 (24")	350 (14") - 600 (24") - 1200 (48")	350 (14") - 600 (24") - 1200 (48")	350 (14") - 600 (24") - 1200 (48")
Fastener length available, mm	300 (12") - 600 (24")	300 (12") - 600 (24") - 1200 (48")	300 (12") - 600 (24") - 1200 (48")	300 (12") - 600 (24") - 1200 (48")

PACKAGING

According to your needs

PER BOX OF 4 JUNCTIONS

the kit contains:

- 4 fasteners at the length* adapted to the width of your belt:
300 - 600 mm for CL25 models,
300 - 600 - 1200 mm for CL30 - 40 - 50 models.
- Pins to be ordered separately.

*Lengths available according to Clip'N Lock® models.
Some lengths are available on request: contact us.

PER CASE OF 48 JUNCTIONS

the kit contains:

- 48 fasteners at the length* adapted to the width of your belt:
300 - 600 mm for CL25 models,
300 - 600 - 1200 mm for CL30 - 40 - 50 models.
- Pins to be ordered separately.



PATENTED PRODUCT
MADE IN FRANCE

 **MLT GROUP**
Conveyor Solutions Expert

 **MLT GROUP**
Minet Lacing Technology

 **TECHNICUM**
MLT GROUP

www.mltgroup-conveyor.com - info@mltgroup-conveyor.com