

RIVETS FASTENERS




Lacings / Heavy duty belts



WHAT IS RIVETS FASTENER?

A robust fastener which adapts to all conditions

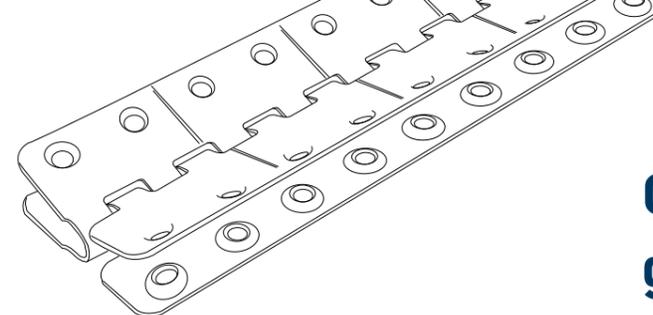

Rivet Fastener: Economical and Robust

Heavy duty fastener with specially designed rivets to withstand the toughest loads.

Rivet fasteners are well suited for surface and underground mining, as well as applications in difficult conditions, such as quarry and construction equipment.

The Rivet fastener range is comprised of 7 sizes.

Rivet fasteners are suitable for belts from 1 to 18 mm thickness and pulleys from 20 to 300 mm diameter.

The installation is carried out with a hammer.

The rivets are available in coated carbon steel or stainless steel 316L. The rivets are supplied in bags or on strip, in stainless steel 316L or copper.



THE ADVANTAGES

- Installation on most belts.
- Rivets made of copper or stainless steel alloy.
- Fastener available in galvanized steel or stainless steel.
- Excellent closure of the fastener on the belt.

Our range of rivet fasteners for grape harvesting machines

Airport fastener

The **Airport** rivet fastener is a fastener suitable for grape harvesting machines equipped with belts with a thickness between 3 and 6 mm.

It is manufactured in stainless steel 316L, delivered with stainless steel or copper rivets on bar (for an easier installation) and rigid stainless steel spindle.

- The fastener is available with straight or beveled edges.
- Available in rigid and semi-rigid versions.
- Standard lengths: 160 mm to 470 mm (consult us).



Rigid Airport



Rigid beveled Airport

Belt thickness		Operating voltage		Mini pulley ø		Failure stress		Number of rivets per meter
mm	inch	N/mm	PIW	mm	inch	N/mm	PIW	
3 - 6	1/8 - 9/32	20	114	35	1 ³ / ₁₆	200	1142	160

Fastener A

Rivet fastener **A** is a fastener suitable for grape harvesting machines equipped with belts with a thickness between 5 and 7 mm.

It is made of 316L stainless steel, delivered with stainless steel or copper rivets on bar (for easier installation) and rigid stainless steel spindle.

- The fastener is available with straight or beveled edges.
- Available in rigid and semi-rigid versions.
- Standard lengths: 250 mm to 350 mm (consult us).



A rigid



Back view

Belt thickness		Operating voltage		Mini pulley ø		Failure stress		Number of rivets per meter
mm	inch	N/mm	PIW	mm	inch	N/mm	PIW	
5 - 7	3/16 - 9/32	35	200	75	2 ⁶¹ / ₆₄	350	2000	96

Applications



Heavy industries



Underground mines



Cement plants



Quarries and surface mines



Logistics




Agriculture



Airports



Conditioning

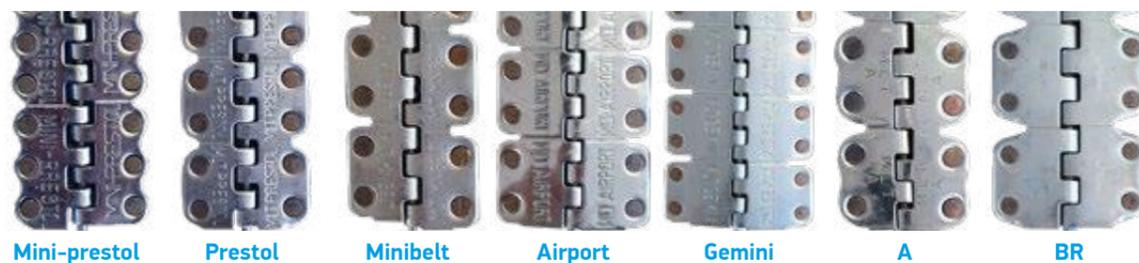

INSTALLATION TOOLS

Rivet fasteners are simply installed with a hammer.

RIVETS FASTENERS

MLT Minet Lacing Technology
More than 70 years of innovation
at your service



www.mltgroup-conveyor.com - info@mltgroup-conveyor.com