

# TECHNICAL DATA SHEET

## SELF-LOCK® FASTENER

PATENTED PRODUCT  
MADE IN FRANCE

### TECHNICAL DATA

#### FASTENER

Fastener size	Belt thickness		Minimum pulley diameter		Maximum operating tension of the belt	
	mm	inch	mm	inch	N/mm	PIW
SL 00	0.7 - 1.8	1/32" - 5/64"	25	1"	12	70
SL 01	1.8 - 2.4	1/16" - 3/32"	40	1"½	16	95
SL 02	2.4 - 3.5	3/32" - 9/64"	50	2"	28	160
SL 03	3.5 - 4.8	1/8" - 3/16"	60	2"¼	38	220



Self-Lock® 00  
(stainless steel)

Self-Lock® 01

Self-Lock® 02

Self-Lock® 03



# PACKAGING

## According to your needs

### PER BOX OF 4 JUNCTIONS\*

the kit contains :


- 4 fasteners cut at the length adapted to the width of your belt, (600, 900, 1000, 1050, 1200, 2000, 3000 mm).
- rigid steel or stainless steel pin, adapted to the length, size and model of the clip.

### PER CASE OF 48 JUNCTIONS\*

the kit contains :

- 48 fasteners cut at the length adapted to the width of your belt, (600, 900, 1000, 1050, 1200, 2000, 3000 mm).
- Pins to be ordered separately.

\*available for certain models of Self-Lock® Fasteners : consult us

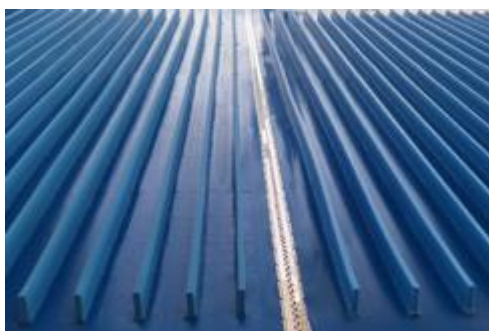

For any support in the installation of our products or in the resolution of problems on your conveyor belt, benefit from our **HOTLINE service** in real time.

Registration on [www.mlt-lacing.com/mlt-hotline](http://www.mlt-lacing.com/mlt-hotline)



PATENTED PRODUCT  
MADE IN FRANCE

[www.mltgroup-conveyor.com](http://www.mltgroup-conveyor.com) - [info@mltgroup-conveyor.com](mailto:info@mltgroup-conveyor.com)